



All the patents are held accountable counterfeiting.

Features



DIMENSIONS: 100(H)*110(D)*60(W)mm
WEIGHTS: 500g

- Convection cooled
- 100% full load burn-in test
- Easy mounting (one-step installation)
- Separation of AC and DC, Excellent of Electromagnetic interference
- RoHS & EMI test and strictness on quality
- 2 year Warranty
- 280,000Hrs MTBF per MIL-HDBK-217F
- Split rail & Series connection possible
- Output modify range: 3V~200VDC

General specifications

INPUT

Input range 90~264VAC
127~380VDC

Input frequency 47~63Hz

Inrush current (25° C) 20A/110VAC
40A/220VAC

OUTPUT

Hold-up time 16mS

Short protection Autorecovery

Overload protection Automatic power limited

Over voltage protection Optional

Power Ready Signal (Optional)


Redundant function (Optional)

Detail specifications

72 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) ¹			Ripple & Noise ⁴	Line REG. ²	Load REG. ³	Efficiency ⁵	O.V.P. Trip point
		Min.	Rated	Max.					
RP1072D-05F	V1: +5.1V ±10%	0A	14.4A	14.4A	70mVp-p	±1%	±2%	70% Min.	5.8~7.0V
RP1072D-12F	V1: +12V ±10%	0A	6.0A	6.0A	100mVp-p	±1%	±1%	73% Min.	15 ~ 18V
RP1072D-24F	V1: +24V ±10%	0A	3.0A	3.0A	150mVp-p	±1%	±1%	75% Min.	27.6 ~ 31V
RP1072D-28F ⁶	V1: +28V ±10%	0A	2.6A	2.6A	150mVp-p	±1%	±1%	75% Min.	32.2 ~ 36.4V
RP1072D-48F	V1: +48V ±10%	0A	1.5A	1.5A	250mVp-p	±1%	±1%	75% Min.	54 ~ 60V

Rdy Connection

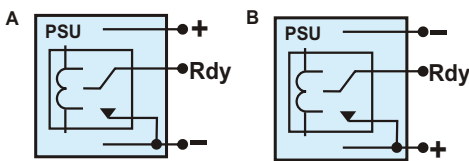

A: Rdy Internal Connection of T Type Terminal Block
B: Rdy Internal Connection of E Type Terminal Block

Please Choose Fit Function, And Fill In The Blank With Suitable Words.

Order Model: RP1072D-24F

Optional Function:

Terminal Block: "T" : PCB Barrier Terminal Block
"E" : Mini Terminal Block

Without Function: "N" Power Ready Signal and Redundant

EMC Standards

EN55022 CLASS B
EN61000-3-2, EN61000-3-3
EN55024 (IEC61000-4-2,
IEC61000-4-3, IEC61000-4-4
IEC61000-4-5, IEC61000-4-6
IEC61000-4-8, IEC61000-4-11)

Safety Standards

CUL 508 APPROVAL
 UL/CSA 60950 APPROVAL
 CE Marking

Environments

Operating Temperature -15 ~ 50°C, Ambient
Operating Humidity 5 ~ 95% RH, No Condensing
Storage Temperature -20 ~ 85°C, Ambient
Vibration 2G, 10~500Hz, 3 axes

- NOTE:**
1. Each output can provide up to maximum load, but total load can not exceed rated output power.
 2. Line regulation is measured from low line to high line at rated load.
 3. Load regulation is measured from 20% to 100% of rated load at 110VAC input. (Redundant function Sepc. 0.6V Add.)
 4. Ripple & Noise is measured by using a 0.1uF/630V metalized capacitor & a 47uF electrolytic capacitor parallel on the test point, at rated load and 110VAC input.
 5. Efficiency is measured at rated load and 110VAC input.
 6. RP1072D-28F series will use the same front lable as "RP1072D-24F", and add side lable as "28V".
 7. Hold-up time is measured at rated load and 110VAC input.

All Specifications be retained the right to modify by Reign Power

WEB : <http://www.switching-powers.com>

E-mail : rp21003f@ms7.hinet.net

Tel : 886-2-22997550

Fax : 886-2-22997596

